

Thermal Imager T20™ with Real Optical 2-5x Zoom


T20 mini-thermal imager offers unique Optical Zoom from 2 to 5x in a tiny package. The device offers the following features:

- On-board image enhancement
- Shutter with automatic NUC capability
- Auto power-save
- Multiple display views: white hot / black hot / NV green / color
- Mounting via 30mm mounting rings

Device can be used in variety of search operations, firefighting and detection and other commercial applications.




Detection Range

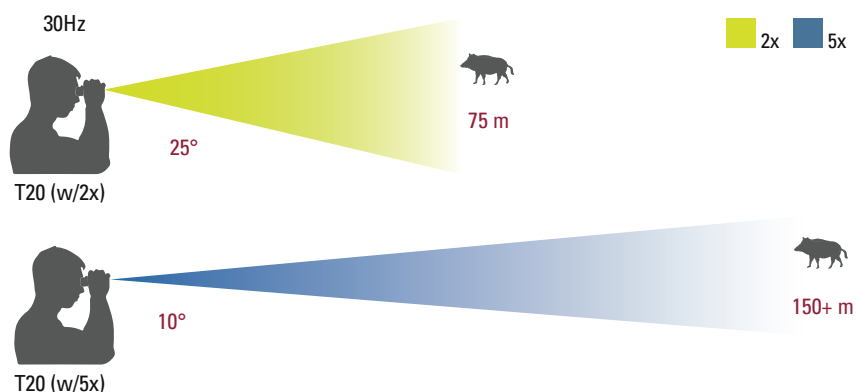

Counterclockwise
for 5x view

Clockwise
for 2x view



Specifications

T20	
Size	70mm x 46mm x 39mm (2.75" x 1.8" x 1.5")
Weight w/o battery	133g (w/o battery)
Zoom	2-5x Continuous optical zoom with auto focus adjustment
Field-of-View	from 25° to 10°
Minimum Focus Distance	1 meter
Spectral Range	8-14 micron
Power	CR2 - rechargeable or disposable, 4+ hours of operation
Resolution	80 x 60 pixels FLIR Lepton
Display	1.3" OLED
Operating Temperature	-10° to +45° C
Frame Rate/Shutter	30Hz with Shutter



Rotate front lens for continuous 2-5x zoom



Mounted

