

Lightning™ LT26

Non-RF Team Communication System




The Lightning™ LT26 hub and helmet mounted companion form a mesh network inside any 15 x 15 x 15 or smaller room. This equipment forms a network that supports 8 users communicating on a TDMA managed HUB or dismantled peer-to-peer communication up to 10 m.

- Voice and data communications inside or outside vehicles
- Communicate through the HUB or peer-to-peer
- Conference comms up to 8 users
- Noisy engine rooms/spaces
- Connect HUBs with LightSpeed™ L30 or similar links

Specifications

Size	6 x 6 x 3 in (hub), 1 x 2 in (button)
Weight Hub	Up to 2 lbs
Weight Button	100 g w/o batteries
Hub Power	8-28V DC vehicle or standalone
Button Power	2 AA batteries
Material	Aluminum, Carbon
Hub I/O Ports	RF-45 Ethernet, Voice
Field-of-View	360° horizontally, Hemispheric vertically
Distance	Up to 10 m

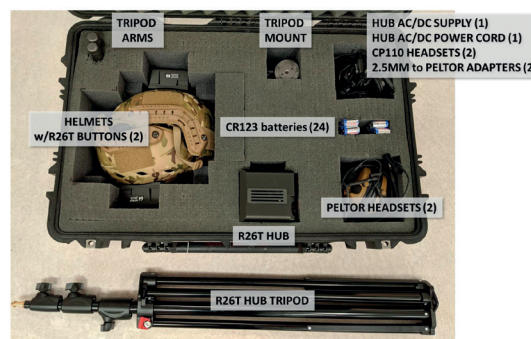

Kit contents

